

## Tech Data

# Viega PureFlow PEX Tubing Sleeve



### Description

Viega PureFlow tubing is available with a flexible high-density polyethylene (HDPE) sleeving that is pre-installed on Viega PureFlow PEX white 100-foot coils in ½" to 1" sizes.

This sleeved PEX product is ideal for direct burial and/or cast in cement applications.

### Features

- Approved for direct burial and cast in cement applications
- Abrasion and chemical resistant

### Ratings

- Operating temperature / pressure: 180°F at 100 psi and 73.4°F at 160 psi<sup>1</sup>

Component	Material
Tubing	Crosslinked Polyethylene
Sleeve	HDPE

<sup>1</sup> PEX tubing listed to ASTM F876/F877



This document is subject to updates. For the most current Viega technical literature please visit [www.viega.us](http://www.viega.us).




Viega products are designed to be installed by licensed and trained plumbing and mechanical professionals who are familiar with Viega products and their installation. **Installation by non-professionals may void Viega LLC's warranty.**

### Listings and Certifications

- IAPMO Certified
- ICC ES-PMG™ 1038 plumbing applications
- NSF certified to CSA B137.5 (Canadian Standards Association)
- Certified to UL 263 & CAN/ULC S101 (U.S. & Canadian fire resistance ratings)
- Certified to ASTM E84 and CAN/ULC S102.22 FS/SD (25/50) (U.S. & Canadian plenum rating)
- HUD (Housing and Urban Development) – MR 1276

### Viega PureFlow Tubing Sleeve Polypropylene - Model V5001.2

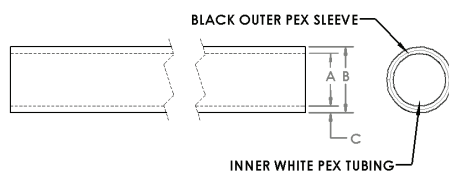

Part No.	Size (in x ft)	Color		A (in)	B (in)	C (in)
		Inner	Outer			
33830	½ x 100	White	Black	0.48	0.63	0.06
33831	¾ x 100			0.67	0.88	0.06
33832	1 x 100			0.86	1.13	0.06

**Viega LLC**  
585 Interlocken Blvd.  
Broomfield, CO 80021

Phone (800) 976-9819  
[www.viega.us](http://www.viega.us)

TD-PF 0524 PureFlow PEX Tubing Sleeve

